SUBMITTAL SHEET

S.A.P. / S SHIELDED STATIC AIR PROBE SURFACE MOUNT

CONSTRUCTION SPECIFICATIONS

Aluminum. Aluminum mounting plate, static pressure chamber, and 1/8" FPT signal connection.

□ Stainless Steel. Stainless steel mounting plate, static pressure chamber, and 1/8" FPT signal connection.

PERFORMANCE SPECIFICATIONS

Accuracy. Temperature.

Within 1% of actual static pressure. 200°F continuous.

OPTIONAL CONSTRUCTION


Connection Fittings

□ 1/4" compression, brass (std)

□ 1/4" barb, brass

□ 1/4" compression, stainless steel

DIMENSIONAL SPECIFICATIONS

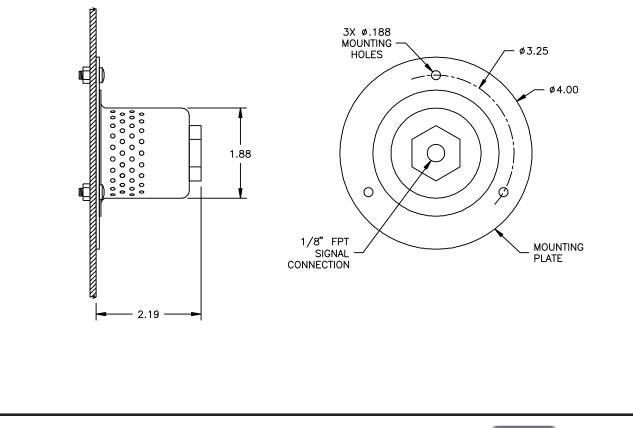



P.O. Box 6358 • Santa Rosa, CA 95406 • (707) 544-2706 • (707) 526-2825 Fax www.airmonitor.com • amcsales@airmonitor.com