


LO-flo PITOT TRAVERSE STATION MODEL P

STANDARD CONSTRUCTION


Casing.	Type 316 stainless steel pipe.
Air Equalizer and Straightener.	Type 316 stainless steel.
Total Pressure Header.	Type 316 stainless steel tubing.
Static Pressure Chamber.	Type 316 stainless steel.
Casing Depth.	See Dimensional Specifications below.
Connection Fittings.	1/4" FPT.
Operating Temperature.	Continuous operation to 900°F.
Resistance to Flow.	0.3 times the velocity head (pressure) of the design flow rate.
Maximum Static Pressure.	20 psig.

DIMENSIONAL SPECIFICATIONS

STATION NOMINAL SIZE	A O.D.	A I.D.	B O.D.	NO. OF TOTAL PRESSURE SENSORS	NO. OF STATIC PRESSURE TAPS	J NOMINAL	EQUALIZER/STRAIGHTENER
.75"	1.05	.92	1.66	4	4	1.06	1/8" x 2" DEEP
1"	1.315	1.185	1.90	4	4	1.05	1/8" x 2" DEEP
1.25"	1.66	1.53	2.375	6	6	1.11	1/8" x 2" DEEP
1.50"	1.90	1.77	3.50	6	6	1.55	1/8" x 2" DEEP
2"	2.375	2.245	3.50	8	6	1.32	1/8" x 2" DEEP
3"	3.50	3.334	4.50	14	8	1.25	1/8" x 2" DEEP
4"	4.50	4.334	5.563	14	8	1.28	1/4" x 3" DEEP
5"	5.563	5.295	6.625	14	8	1.28	1/4" x 3" DEEP
6"	6.625	6.357	7.625	14	8	1.25	1/4" x 3" DEEP
8"	8.625	8.407	9.625	14	8	1.25	1/4" x 3" DEEP

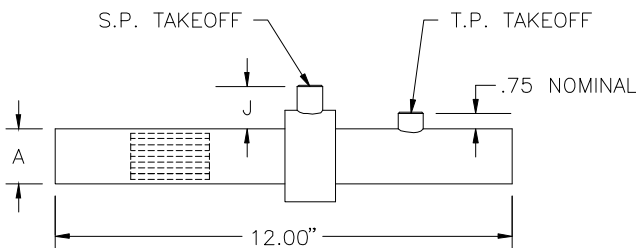

SIDE VIEW

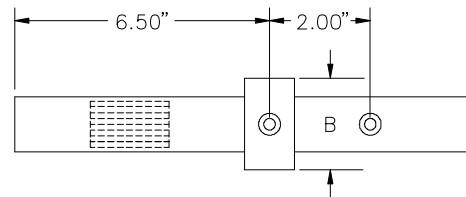

TOP VIEW

