

ABB MEASUREMENT & ANALYTICS | FLOW COMPUTERS & REMOTE CONTROLLERS

# **XSeries products**

Precise measurement and automation intelligence



Remote measurement and automation systems from ABB take you beyond mere integration through software and hardware solutions that are compatible with your business and with each other. Totalflow products deliver the most accurate information in the most efficient manner.




### **Table of contents**

O2 Introduction
O4 Overview
O6 Flow computers and RTUs
O8 Automation applications
10 Available accessories

#### Benefits of using ABB's flow computers and RTUs

**Product comparison** 

- Monitor, measure and control your facilities anywhere, anytime
- Measure and monitor gas and liquid flow in compliance with AGA, API, and ISO standards
- Reliable measurement, automation, monitoring, control and alarming applications for remote oil and gas systems
- Easy-to-use software systems for real-time measurement and control right from the office



11

Did you know?

ABB has over 300,000 flow computers and RTUs installed in oil & gas worldwide.

### **Expertise in technology**

# Accuracy, efficiency, safety and productivity

We've built greater efficiency into every function of the XSeries products, resulting in exceptional productivity and profitability.

#### The challenge

Today's natural gas market requires high measurement accuracy and real-time gas/liquid custody-transfer and flow information, either from local or remote installations.

Rising prices for oil and gas have made it more important to have accurate and reliable measurements of flow. Custody transfer is one of the most important applications where the ownership of a fluid or gas is transferred from one person or company to another. In this transfer phase, it is critical that both parties agree on the type of flowmeter and on the conditions of use.

#### The solution

The XSeries flow computers target the oil and gas industry's custody-transfer and measurement needs. These low-power, highly reliable, microprocessor-based units meet a wide range of measurement, monitoring, and control applications for remote gas or oil systems.

All flow computers and RTUs comply with API, AGA, and ISO standards for custody-transfer electronic measurement devices and for flow rate, volume and energy calculations. In addition, all calculations are performed once per second and historical flow volumes and data logs can be stored for more than 40 days.

Easy installation, minimal calibration and accurate custody-transfer are just a few of the benefits of using ABB products.



**Energy efficient** 



**Cost effective** 



**Backward compatible** 



Flexible communications



Quick, easy installation



Extendable hardware and software



Highly accurate



**Onboard Ethernet** 



Multiple computer interface options







## **Absolute efficiency**

# Maximize quality and productivity

Choose from a complete portfolio of cutting-edge solutions to accurately, measure, record and control.

> Representing a convergence of state-of-the-art technologies, ABB's XSeries products are scalable across all segments of oil and gas automation and measurement applications. Distributed control, wireless I/O, and data logging are among the many functions that seamlessly co-exist within ABB's XSeries products.

#### XSeries features



- Automate and control right from the office



Measure in compliance with AGA / API standards



Cost savings and increased revenues



OOO - Multi-tube capabilities for control of large sites



Explosion-proof, cast aluminum





#### **Measurement solutions**

Flow computers: Measurement, monitoring, automation and control on site

#### XFC Extendable flow computer

XFC units include an Integrated Multivariable Transducer to meet a wide range of measurement, automation, monitoring, control, and alarming applications. The processing and memory capability of the devices allow the user to run more applications faster than ever before.









#### μFLO Basic flow computer

The microFLO (µFLO) series' main board and Integrated Multivariable Transducer comprise a single unit. This "smaller" version with limited expansion capabilities is ideal for single-tube applications, but can accurately measure and monitor gas flow in compliance with AGA, API and ISO standards.







### XFC EX Explosion-proof flow computer

For metering and automation systems in extreme conditions, the 6200EX feature explosion-proof, cast-aluminum enclosures. They are extendable, include an Integrated Multivariable Transducer, and meet the needs of customers requiring a Class 1, Division 1 design.













#### **Automation solutions**

Remote controllers: Monitor, measure and control your facilities from anywhere

#### XRC Extendable remote controller

The XRC series is made up of full-featured units with standard I/O designed to meet the requirements of many low-cost measurement and automation projects. Devices can be extended in a flexible and simple way by adding modular IO as needed. They feature easy installation, and accurate custody transfer systems.









#### XRC Extendable panel-mount controller

We offer greater functionality and flexibility than competitors' custom products which require multiple companies to provide complex, engineered solutions. The XRC 6990 features a non-weatherproof enclosure that can be installed in a standard, 19-inch, vertical computer rack system.









# **Automation intelligence**

### Production optimization solutions


ABB's integrated automation solutions feature applications to optimize your site's efficiency and accuracy.

#### A lifecycle solution

Our goal is to optimize the productivity of your assets across their full lifecycle. The newest generation of powerful, fully extendable flow computers and RTUs can be configured to measure and control many types of facilities ranging from well pads to multi-tube meter runs. Regardless of what you're producing or where your fields may lie, ABB can help automate and enhance your production.

#### Applications that produce results

- · Measure accurately
- · Maximize production volume
- · Increase ultimate recovery
- Minimize downtime
- Delay work-over expenses
- Reduce truck rolls

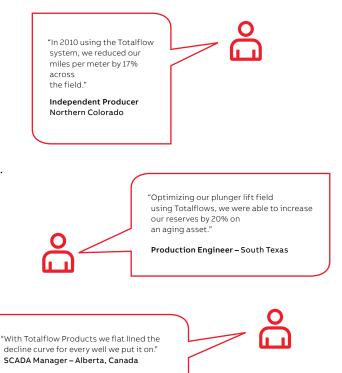





ABB's flow computers and RTUs come standard with numerous applications built in. We offer a "credit" system that allows users to choose which applications best suit their needs. Each unit comes with a standard number of credits and more credits can be purchased if necessary.

√ = Included in purchase

\$ = Credit required

		No. of credits included with purchase				
		4	4	4	2	
Application	Description	XFC	XRC	XFCEX	μFLC	
Operational applications						
Analysis Trend File	Gas composition logs from online GC	\$	\$	\$	\$	
Communications	Used to set up communication	<b>4</b>	<b>✓</b>	✓	<b>✓</b>	
Conversion Units	Converts units of measure	✓	<b>✓</b>	✓	<b>✓</b>	
Coriolis Data Interface	Communication interface for Coriolis meter	✓	<b>✓</b>	✓	<b>√</b>	
Display	Controls data shown on LCD display	✓	<b>✓</b>	✓	✓	
Enron Interface	Enron Modbus support of AGA3 and AGA7	<b>4</b>	<b>✓</b>	✓	<b>✓</b>	
Holding Registers	General purpose data registers	<b>✓</b>	<b>✓</b>	<b>✓</b>		
O Interface	Scans all I/O data, onboard and TFIO modules	<b>✓</b>	<b>✓</b>	✓		
LevelMaster Interface	Interface to the LevelMaster product	<b>✓</b>	<b>√</b>	<b>✓</b>	1	
NGC Client	TCP/IP Modbus interface to NGC	<b>√</b>	<b>√</b>	<b>✓</b>	1	
Operations	Configurable math and logic functions	<b>✓</b>	<b>✓</b>	<b>✓</b>	1	
Protocol Multiplexer	Interfaces two host systems to one communications channel	\$	\$			
Pulse Accumulator	Scales and accumulates pulse inputs for basic volume totals	<b>✓</b>	<b>✓</b>	<b>✓</b>	<b>✓</b>	
RAMS (Alarm) System	Configurable alarm detection, logging, and reporting	<b>✓</b>	<b>✓</b>	<b>✓</b>		
Therms Master	Gathers and sends gas analysis data via Modbus to Slaves	<b>✓</b>	<b>✓</b>	<b>✓</b>	1	
Therms Slave	Receives gas analysis data from EFM with Therms Master	<b>√</b>	<b>√</b>	<b>✓</b>	<b>√</b>	
Trend System	Configurable trending functionality	<b>✓</b>	<b>✓</b>	<b>✓</b>	<b>✓</b>	
WLIO Interface	Interface to the WellTell wireless products	<b>✓</b>	<b>√</b>			
XMV Interface	Communications interface for an external multivariable	<b>✓</b>	<b>✓</b>	<b>✓</b>	<b>✓</b>	
Automation applications						
Gas Lift	Artificial lift for wells with liquid loading problems	\$	\$	\$		
IEC Interface	IsaGraf Custom Logic	<b>\$</b> †	\$ <sup>†</sup>	\$ <sup>†</sup>		
Pad Controller	Allows control of multiple wells	\$	\$	\$		
PID Control	Allows the use of PID controllers	<b>√</b>	<b>✓</b>	<b>✓</b>		
Plunger Lift	Allows control of a plunger on a production well	\$	\$	\$		
Pump Control Interface	Prebulit interfaces for various pumps	\$	\$	\$		
Shutdown System	Shutdown a well or site	<b>✓</b>	<b>✓</b>	✓		
Valve Control (AO/DO)	Allows control of flow / pressure using Valve Control Module	<b>√</b>	<b>✓</b>			
Measurement applications		,				
AGA3	Orifice gas measurement	\$	\$	\$	\$	
AGA7	Linear gas measurement	\$	\$	\$	\$	
Coriolis Measurement	Coriolis gas flow measurement	\$	\$	\$	\$	
Liquid Measurement	Linear liquid (API) measurement	\$	\$	\$	\$	
NIST 14 Gas	CO <sup>2</sup> measurement	<b>\$</b> †	<b>\$</b> †	<b>\$</b> †	\$ <sup>†</sup>	
NIST 14 Liquid	CO <sup>2</sup> measurement	\$ <sup>†</sup>	\$ <sup>†</sup>	<b>\$</b> †	\$ <sup>†</sup>	
Nozzle Measurement	Flow nozzle gas and water measurement	\$	\$	\$	\$	
Oil Transfer Measurement	Creates truck load ticket from tanks	\$	\$	\$	\$	
/Cone	VCone gas flow measurement	\$	\$	\$	\$	
Wedge Gas	Wedge gas flow measurement	\$	\$	\$	\$	

 $<sup>^{\</sup>dagger}\!A \ special \ credit \ is \ required \ for \ these \ applications. \ Contact \ your \ sales \ representative \ for \ more \ information \ on \ purchasing \ information.$ 

### **Available accessories**

Contact ABB for more information on available accessories.



### Power systems

#### Solar panels

The XSeries products can be configured to work with solar panels. A variety of sizes are available to offer solutions for any circumstance. Solar panels are a cost-effective power source for remote locations that require equipment to withstand harsh conditions.

#### Internal batteries

ABB offers an assortment of battery capacities to choose from. Contact ABB for assistance in determining battery and solar requirements.



#### Miscellaneous accessories

- Pressure, temperature, & multivariable transmitters
- Manifolds
- I/P converters
- RTDs
- Thermowells
- Manifold test port kits
- Antennas & coax
- Tubing and fittings
- · Pipe saddles



### Touch-screen displays

Touch screen panels give you complete HMI functionality for capable devices. They also allow you to easily connect, monitor and control processes across a broad range of industries. Serial devices can easily be connected through Ethernet connection on all the touch panel models.



#### Communications kits

ABB offers an assortment of communication kit options including mounting brackets, wiring harnesses, and various brands of communication devices such as spread spectrum and licensed radios. Contact ABB for assistance in determining the kit that best suits your needs. Contact ABB for more information on available accessories.





### XSeries product comparison











Touch screen XRC

XFC

Explosion-proof XFC

Panel-mount XRC

μFLO

	Enclosure type / size	Approximate weight (w/o battery)	Maximum Input/Output modules	Maximum battery capacity	Supports automation applications	Integrated Multivariable Transducer				
Flow computers										
Differential flow o	omputers									
XFC 6410	Small enclosure	13.5 lbs	0	26AH	<b>✓</b>	<b>✓</b>				
XFC 6413	Medium enclosure	15 lbs	3	26AH	<b>✓</b>	✓				
XFC 6713	Large enclosure	29 lbs	6	52AH	✓	<b>✓</b>				
μFLO 6213	Medium enclosure	15.1 lbs	4-Point I/O opt. expansion card	26AH		✓				
XFC 6200 EX	Explosion-proof enclosure	16.5 lbs	12-Point I/O opt. expansion card	Internal battery not supported	✓	✓				
Linear flow compu	iters									
XFC 6411	Small enclosure	11.5 lbs	0	26AH	<b>✓</b>	<b>√</b>				
XFC 6414	Medium enclosure	12 lbs	3	26AH	<b>✓</b>	✓				
XFC 6714	Large enclosure	27 lbs	6	52AH	<b>✓</b>	✓				
μFLO 6213	Medium enclosure	15.1 lbs	4-Point I/O Opt. Expansion Card	26AH		✓				
XFC 6201 EX	Explosion-Proof enclosure	16.5 lbs	12-Point I/O Opt. Expansion Card	Internal battery not supported	<b>√</b>	✓				
RTUs										
XRC 6490	Small enclosure	15 lbs	3	26AH	<b>✓</b>					
XRC 6790	Medium enclosure	29 lbs	6	52AH	✓					
XRC 6890	Large enclosure	45 lbs	14	140AH	<b>✓</b>					
XRC 6895*	X-Large enclosure	60 lbs	22	Internal battery not supported	✓					
XRC 6990	Panel-mount	12 lbs	6 per board (max. 2 boards)	26/30AH	<b>✓</b>					

<sup>\*</sup>XRC 6895 also has 20 fused power terminals (DIN rail mounted) and 259 mini terminal connections (mini DIN rail mounted).



ABB Inc.

**Measurement & Analytics** 

Quotes:totalflow.inquiry@us.abb.comOrders:totalflow.order@us.abb.comTraining:totalflow.training@us.abb.comSupport:totalflowsupport@us.abb.com

+1 800 442 3097 (opt. 2)

**Main Office** 

7051 Industrial Boulevard Bartlesville, OK 74006 Ph: +1 918 338 4888

www.abb.com/upstream

California Office

4300 Stine Road Suite 405-407 Bakersfield, CA 93313 Ph: +1 661 833 2030

**Kansas Office** 

2705 Centennial Boulevard Liberal, KS 67901 Ph: +1 620 626 4350

Texas Office - Odessa

8007 East Business 20 Odessa, TX 79765 Ph: +1 432 272 1173 Texas Office - Houston

3700 West Sam Houston Parkway South, Suite 600 Houston, TX 77042 Ph: +1 713 587 8000

Texas Office - Pleasanton

150 Eagle Ford Road Pleasanton, TX 78064 Ph: +1 830 569 8062